

Adventer Plus Integral Chest Freezer (Plug-in)



BENEFITS AT A GLANCE

- Unique design with up-down service-over open glass doors
- Curved glass to enhance product display
- Higher load design (550mm, $\leq -18^{\circ}\text{C}$)
- Hot gas defrosting, saving energy


CUSTOMER VALUE

- Up-down sliding doors for convenient shopping for multiple customers simultaneously
- Storage amount +10%
- Display area +10%
- Save energy by 15%
- Refrigeration speed +15%
- Defrost time -75%




Standard Model	Adventer Plus ICF-K Integral Chest Freezer (Plug-in)								Adventer Plus ICF-PV Integral Chest Freezer (Plug-in)							
	LD-ICF 150808K	LD-ICF 180807K	LD-ICF 220808K	LD-ICF 250808K	LD-ICF 150808K UD	LD-ICF 180807K UD	LD-ICF 220808K UD	LD-ICF 250808K UD	LD-ICF 150808 PV	LD-ICF 180807 PV	LD-ICF 220808 PV	LD-ICF 250808 PV	LD-ICF 150808 PV UD	LD-ICF 180807 PV UD	LD-ICF 220808 PV UD	LD-ICF 250808 PV UD
Dimensions (Width)	1504	1844	2204	2504	1504	1844	2204	2504	1504	1844	2204	2504	1504	1844	2204	2504
Dimensions (Depth)	853															
Dimensions (Height)	945	825	945	945	945	825	945	945	945	825	945	945	945	825	945	945
Operation Temperature (°C)	-22~-18															
Temperature Grade	3 L1															
Rated Voltage (V)	220V															
Rated Frequency (Hz)	50Hz															
Net Weight (kg)	135	138	157	190	138	141	160	193	135	138	157	190	138	141	160	193
Display Area (m ²)	0.99	1.21	1.51	1.72	0.82	1.03	1.26	1.42	0.99	1.21	1.51	1.72	0.82	1.03	1.26	1.42
Effective Volume (m ³)	0.39	0.45	0.62	0.72	0.39	0.45	0.62	0.72	0.39	0.45	0.62	0.72	0.39	0.45	0.62	0.72
Energy Efficiency Level (EEL)	Grade 2								Grade 3							

NOMENCLATURE

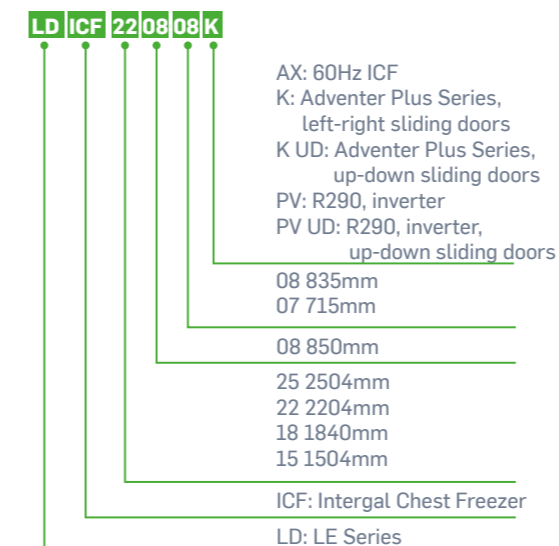

DIMENSION DRAWING

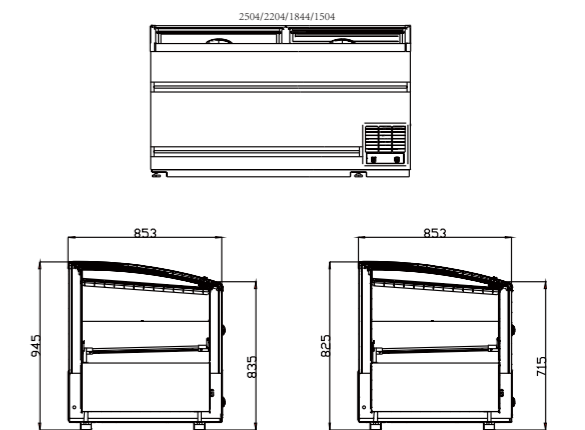

Adventer Plus Integral Chest Freezer (Plug-in)