



Frost-free Remote Lunch Case



Naming Rules

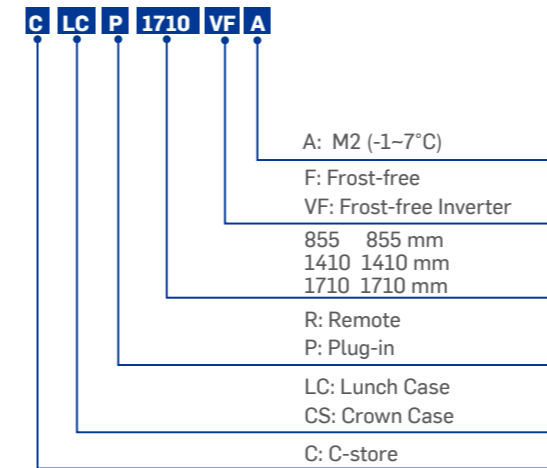

Dimension Drawing

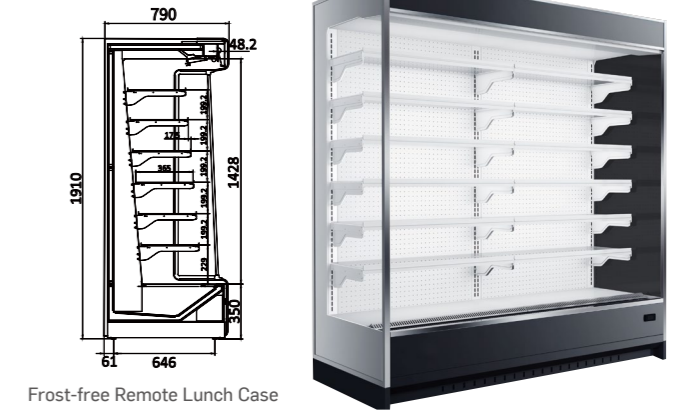

Benefits at a Glance

- No need to defrost, more stable storage temperature(± 0.2 °C) to reduce cargo damage
- More efficient and energy-saving, reducing operating costs
- Revolutionary innovation in patented design
- Cooling load demands reduce by 15%

Standard Configuration

- Night curtain: With night curtain
- Controller options: Carrier standard refrigeration controller
- Heating strip options:
 - FA: Heating strip
- Shelf options:
 - F: Fixed glass shelf 5 layers
 - FA: 6 layers
- LED light options: T8 Express, 6500K
- Wooden brace without side panels options:
 - Double side panels(without wooden brace)
- Hole cover color options: White

Product Parameters

Standard Model	Frost-free Remote Lunch Case			
	CLCR855F	CLCR1710F	CLCR855FA	CLCR1710FA
Width (mm)	855	1710	855	1710
Depth (mm)	750			
Height (mm)	1910			
Rated Voltage (V)	220			
Rated Frequency (Hz)	50/60			
Refrigeration temperature range (°C)	1-10	1-10	-1-7	-1-7
Refrigerant	R410A	R410A	R410A	R410A
Fan Input Power (W)	12	24	12	24
Net Weight (kg)	190	290	190	290
Display Area (m ²)	2.05	3.32	2.05	3.32
Effective Volume (m ³)	0.46	0.92	0.46	0.92
Energy Efficiency Level (EEL)	2	2	1	2